

# BSEN14975 : 2006


# LYTE EASILOFT



- ✓ Factory assembled - installs in minutes
- ✓ Certified to BSEN14975:2006
- ✓ Clear and easy to follow instructions
- ✓ Box section styles for strength and comfort
- ✓ Spring loaded catches, safer and stronger
- ✓ Handrail included on two and three section
- ✓ Non slip rubber feet for safety
- ✓ Maximum load 150kg

**Call or email NOW:**  
**Tel: 01792 796666**  
 Email: [sales@lyteladders.co.uk](mailto:sales@lyteladders.co.uk)

	Two Section	Three Section
<b>Max. Floor to floor</b>	2.67m	3.00m
<b>Min. Loft clearance</b>	1.25m	1.05m
<b>Min. Loft opening</b>	457mm x 560mm	432mm x 508mm

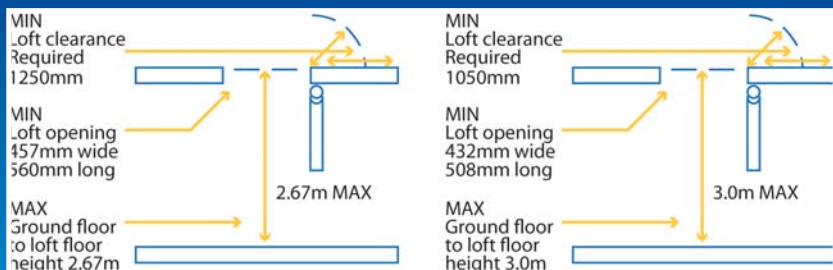

BSEN14975



**150KG MAX PERMISSIBLE LOAD**



[www.lyteladders.co.uk](http://www.lyteladders.co.uk)

# BS EN14975

# LYTE DELUXE EASILOFT




- ✓ Slim and compact design for easy storage in the loft
- ✓ Spring assisted arm inside the loft which allows total control when lowering or storing the loft ladder
- ✓ Manufactured to fit most loft hatches
- ✓ Comfortable handrail for added safety
- ✓ Installation instructions and user guide included
- ✓ Certified to BS EN14975



Call or email **NOW:**  
**Tel: 01792 796666**  
Email: [sales@lyteladders.co.uk](mailto:sales@lyteladders.co.uk)

	Two Section	Three Section
Max. Height	2.67m	3.00m
Min. Height	1.25m	1.05m
Pitch	457mm x 560mm	432 x 508
Vertical Pitch	280mm	280mm
Min. Internal Loft Height	1380mm	1010mm

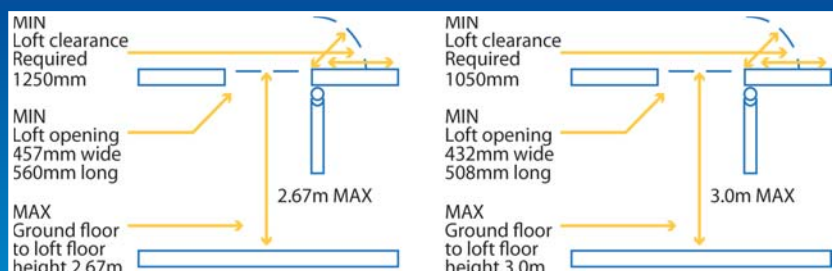

BSEN14975



150KG MAX PERMISSIBLE LOAD



[www.lyteladders.co.uk](http://www.lyteladders.co.uk)